

## Wash Select II™ & Wash Select II™ POS

### MARKETING FEATURES WITH PROGRAMMING INSTRUCTIONS

#### Multi-Coin Option

##### What it's all about:

This feature can actually make it easier for customers to use your carwash after a visit to their local ATM, since most ATM's dispense \$20 bills. Dispensing change from a \$20 bill is much more desirable using dollar coins rather than quarters.


##### Marketing Tip:

Here's a way to use the "Token" feature of the Unitec Multi-Coin Option to increase business and build customer loyalty. Since you can program up to four different tokens, assign different values to each and hand them out for re-washes. Another idea: sell them to local businesses to give or resell to their customers.



#### Programming Instructions for the Multi-Coin Option

**Note:** A small flat tip screwdriver and 6 sample tokens of each token you wish to program are needed to set up this feature. Up to four different types of tokens can be programmed.

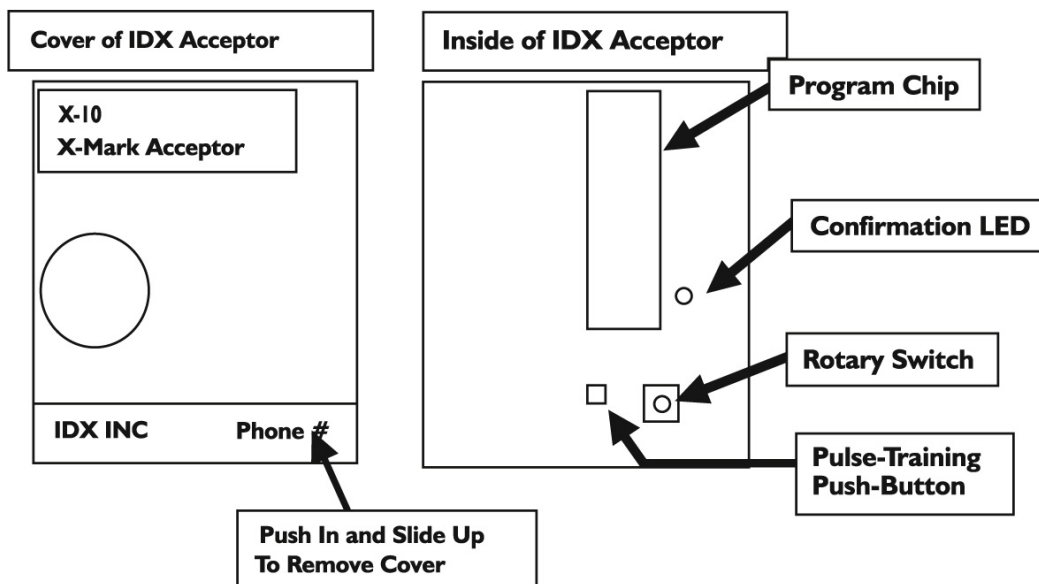

1. Open the case of the WSII and locate the IDX X-10 acceptor on the inside of the door.
2. Remove the cover off of the acceptor by pushing up on the bottom right hand corner.
3. Locate the dial in the bottom right corner. Using a small flat tip screwdriver, turn the dial to position "1".
4. Press the button immediately to the left of the dial one time for each dollar increment of the token's value. (Example: if you want the token to have a \$3 value, press the button 3 times.)
5. Drop the six sample tokens through the acceptor opening on the front of the WSII door. Verify that the light (LED) on the right, center of the IDX acceptor blinks multiple times after the last token is entered.
6. Reset the dial to "0" and replace the front cover, or to program another token, turn the dial to position "2" and follow steps 4-6.
7. Test the token(s) to verify they have been programmed by inserting them into the IDX coin acceptor opening on the front of the WSII door.